


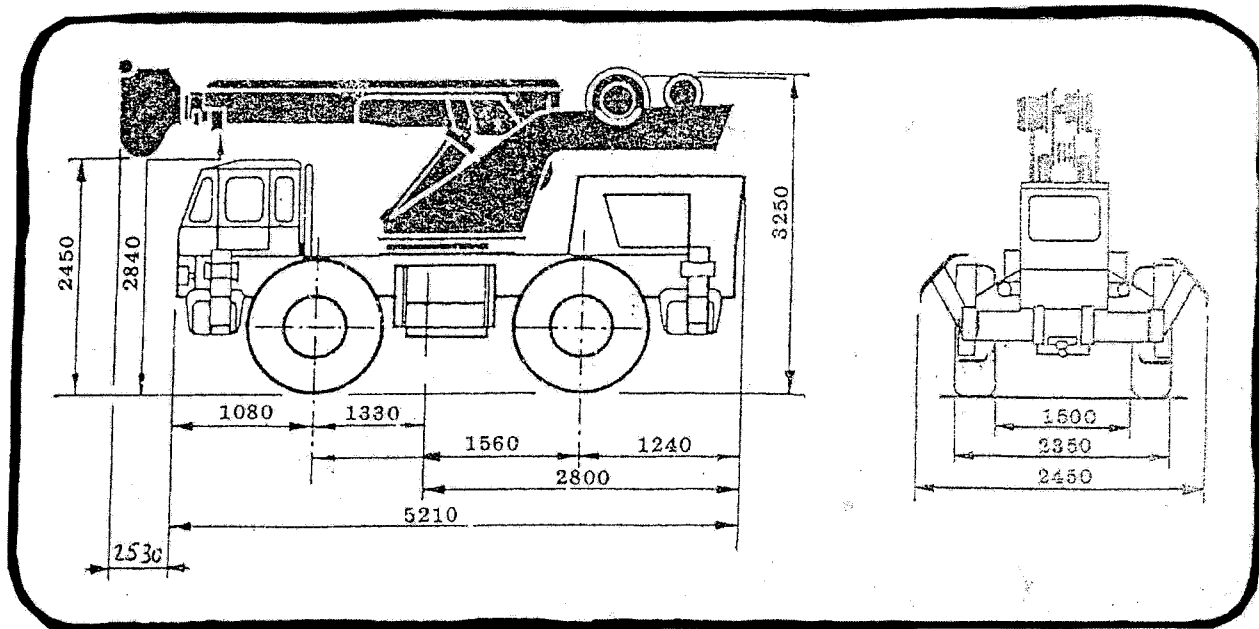

GRUA AUTOPROPULSADA

MODELO RT - 58
CAPACIDAD 12.700 TM
ALTURA 12.80 Mts.

CAPACIDAD DE ELEVACION EN KGS.

SOBRE ESTABILIZADORES

SOBRE NEUMATICOS


	LONGITUD DE PLUMA EN METROS								LONGITUD DE PLUMA EN METROS							
	5'50		7'30		10'90		12'80		5'50		7'30		10'90		12'80	
Radio	Frontal	360°	Frontal	360°	Frontal	360°	Frontal	360°	Frontal	360°	Frontal	360°	Frontal	360°	Frontal	360°
3	12.700	12.700	12.700	12.700	10.600	9.150	8.750	6.870	9.750	6.940	9.750	6.940	7.650	5.980	6.550	5.110
4	12.380	9.470	12.380	9.470	7.750	6.930	7.340	5.830	7.350	4.130	7.350	4.130	5.215	3.963	4.830	3.620
5	9.340	6.630	9.340	6.630	6.900	5.670	5.850	4.650	4.940	2.620	4.940	2.620	3.315	2.415	3.225	2.105
6			7.370	5.410	5.900	4.740	5.100	3.520			3.740	1.840	2.965	1.630	2.520	1.423
7			6.010	4.410	5.430	4.120	4.500	3.140			2.860	1.360	1.950	1.253	1.715	1.012
8					4.880	3.470	3.810	2.820					1.725	1.123	1.523	905
9					3.900	2.665	3.150	2.235					1.530	975	1.230	816
10					3.070	2.270	2.710	1.980					1.315	580	1.085	513
12							2.290	1.565							710	485
14																

SE DESPLAZA CON CARGAS HASTA 2.500 Kgs.

RT58

12,7 TM. DE CAPACIDAD

CUADRO DE ALCANCES

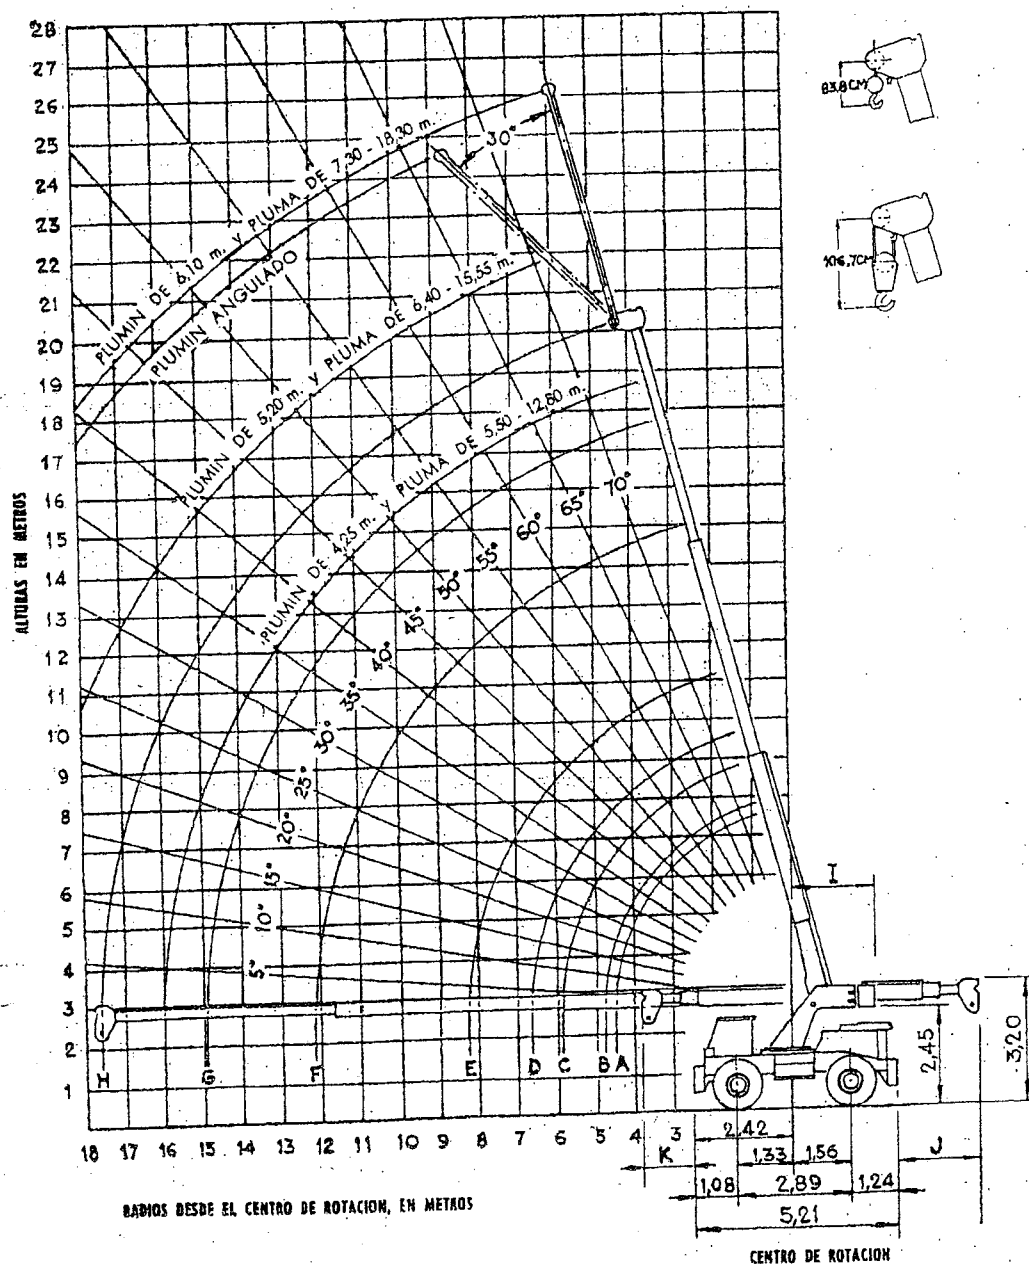

PLUMINES DE 4,25 y 5,20 m.
TABLA DE CARGAS

ANGULO MINIMO DE PLUMA	SIN ANGULAR	ANGULO MAXIMO
75	2.810	1.635
70	2.270	1.360
65	1.950	1.135
60	1.680	955
55	1.495	840
50	1.180	770
45	1.090	715
40	1.000	680
30	860	

PLUMIN DE 6,10 m.
TABLA DE CARGAS

ANGULO MINIMO	SIN ANGULAR	ANGULO MAXIMO
75	2.810	1.180
70	2.270	1.090
65	1.950	1.045
60	1.680	975
55	1.495	955
50	1.180	750
45	1.090	680
40	1.000	660
30	860	545

ANCHURA MAXIMA: 2,45 m.

RADIO DE GIRO: 5,79 m.

DETALLE DE LAS 4 VARIANTES DE PLUMA

VARIANTES	LONGITUD RECOGIDA	LONGITUD EXTENDIDA	NUM. SECCIONES	ALCANCES		PLUMIN	I	J	K
				DESDE	HASTA				
I	5,20	8,25	2	A	E	5	2,29	2,02	2,38
II	5,50	12,80	3	B	F	4,25	2,44	2,38	2,53
III	6,40	15,55	3	C	G	5,20	2,44	3,39	3,45
IV	7,30	18,30	3	D	H	6,10	2,44	4,30	4,36

DISTRIBUIDOR EXCLUSIVO:



Maquinaria de Obras Públicas, S. A.

Núñez de Balboa, 85-Tel. 226 75 00- MADRID-6